

ESS Cabinet 344 kWh

Liquid-cooled battery storage system



Liquid-cooled battery storage system based on Hithium prismatic LFP ESS Cells 280 Ah with high cyclic lifetime

Improved safety characteristics and specially optimised for the highest demands on safety, reliability and performance. Suitable e.g. for industrial, utility, and grid serving applications.

- Product certifications:
IEC 62619, IEC 62477, IEC 63056, IEC 61000, UL 1973, UL 9540A, NFPA 855, UN 38.3
- Company certifications:
ISO 9001, ISO 14001, ISO 45001
- Environmental Compliance:
ROHS, REACH

High safety

- High thermal stability thanks to liquid cooling
- Multi-stage, active fire protection system
- Use of highly safe prismatic HiTHIUM LFP cells
- Ultra-wide operating temperature range


Low LCOS (Levelised Cost of Storage)

- Excellent thermal management improves energy throughput by creating an optimal operating temperature
- High energy density
- Highly integrated: including thermal management system, fire protection system, BMS, etc.

ESS Cabinet

344 kWh

Liquid-cooled battery storage system based on prismatic LFP cells with high cyclic lifetime

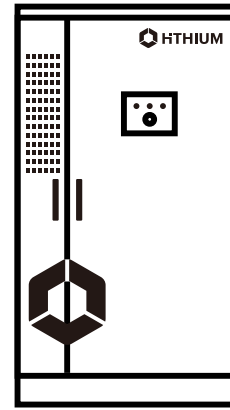

GENERAL

Battery Type	Hithium LFP2801P48S
No. of Battery Modules	4 ... 8
Configuration	Serial connection of modules
Cooling Method	Liquid cooling
BMS Communication	CAN
Gravimetric	> 98 Wh/kg ¹
Volumetric	> 86 Wh/l ¹
Application Altitude	≤ 3.000 m

ELECTRICAL

Nominal Voltage Cabinet	1.228,8 V ¹
Nominal Voltage Module	153,6 V
Operating Voltage Cabinet	T > 0 °C 960 ... 1.401,6 V ¹
	T ≤ 0 °C 768 ... 1.401,6 V ¹
Operating Voltage Module	T > 0 °C 120 ... 175,2 V ¹
	T ≤ 0 °C 96 ... 175,2 V ¹
Nominal Energy Cabinet	344,06 kWh ^{1,2,3}
Nominal Energy Module	43,008 kWh ^{2,3}
Nominal SOC at delivery	27 % ³
Nominal Charge/Discharge Rate	0,5 P / 0,5 P
Round Trip Efficiency	> 94 %

¹ 8 modules

² 0,5 P / 0,5 P

³ 25°C +/- 2,0

⁴ ambient temperature

MECHANICAL

Dimensions (L x W x H)	1.300 x 1.300 x 2.350 mm
Weight Cabinet	< 3.500 kg ¹
Weight Battery Module	310 kg
Protection Level	IP 55

TEMPERATURE RANGE

Operating	-30 °C ... 50 °C ⁴
Storing (recommended)	-20 °C ... 35 °C ⁴

PRODUCT CERTIFICATIONS

Certificates and Reports	IEC 62619, IEC 62477, IEC 63056, IEC 61000, UL 1973, UL 9540A, NFPA 855, UN 38.3
--------------------------	--

ENVIRONMENTAL

Compliance	ROHS, REACH
	Cobalt free

COMPANY CERTIFICATIONS

ISO 9001, ISO 14001, ISO 45001

Hithium Energy Storage Technology Deutschland GmbH

Website: <https://hithium.com> | Email: Contact@hithium.de

Address: Landsberger Str. 155, 80687 Munich, Germany

Xiamen Hithium Energy Storage Technology Co., Ltd.

Address: Hithium Industrial Park, Tongxiang High-Tech Zone, Xiamen, Fujian, China | Email: hithium@hithium.com



LinkedIn



Website